



HF7 SERIES STAINLESS STEEL SINGLE CARTRIDGE HOUSING

V-Band Clamp or Ring-Nut Closure –
Provide easy filter change out with positive seal.
Quick-fit for SOE/FLAT and DOE Cartridges.

Material: SUS 304, SUS316L.

Max. Design Working Pressure: 100 PSI.

Polished or Sandblast External Surface.



HF7-A




HF7-B



Standard Specifications

Model	A (mm)	B (mm)	C (mm)	In/Out
HF7-10"	275	355	Ø89	1/2", 1"
HF7-20"	525	605	Ø89	3/4", 1"
HF7-30"	775	855	Ø89	1"
HF7-40"	1025	1105	Ø89	1"

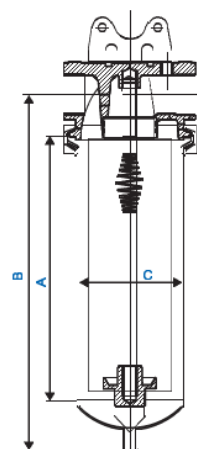

HF7-C




HF7-D



Standard Specifications

Model	A (mm)	B (mm)	C (mm)	In/Out
HF7-10"	280	345	Ø88	3/4", 1"
HF7-20"	534	599	Ø88	3/4", 1"
HF7-30"	788	853	Ø88	1"
HF7-40"	1042	1107	Ø88	1"

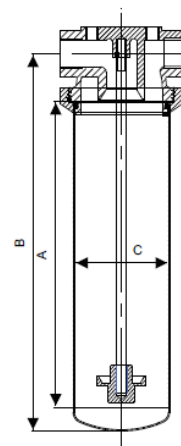

GFS INNOVATION (2006) PTE LTD
 (Industrial Filtration Division)

No. 52, Ubi Ave 3, #05-36 Frontier, Singapore 408867

Tel: (65) 6846 4689 Fax: (65) 6846 4875

Email: enquiry@gfsfilter.com Website: www.gfsfilter.com

