


FBSH SERIES SINGLE BAG FILTER HOUSINGS

FBSH is the best choice for industrial, commercial & OEM applications that do not require a code stamp. The standard design is available with threaded or flanged connection.

This model of housing effectively remove dirt, pipe scale, and other contaminants from process liquids. Quality construction and design assure clean effluent and protection for all downstream equipment.



FBSH23

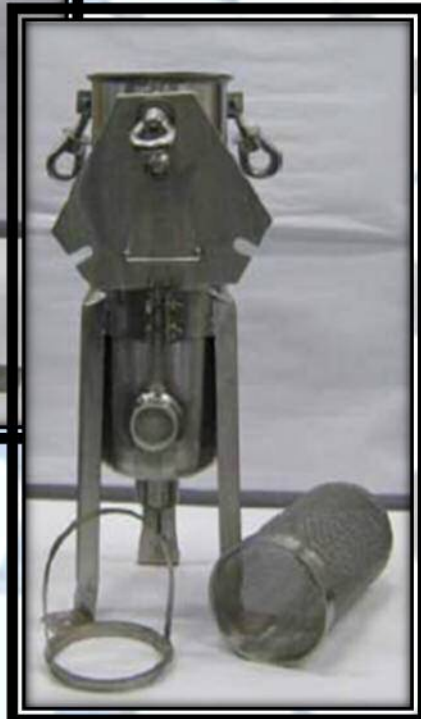

FBSH10

FEATURES INCLUDE

- **Adjustable support Legs**
- **Each vessel is factory hydro-tested**
- **Low pressure drop**
- **Carbon steel and 304 or 316 Stainless Steel construction**
- **Connection in flange or NPT**
FBSH6, 10 - 1", 1 ½ ", 2"
FBSH23, 45 - 1", 1 ½ ", 2", 2 ½ ", 3"
- **Maximum working pressure**
FBSH6, 10, 23 & 45 - 150 PSI and 300 PSI
- **3-bolt swing lid with eye nuts**


SPECIFICATIONS

Model No.	No. of Bags	Bag Size	Standard Inlet/Outlet*	Max. GPM**	Surface area per Bag ft ²
FBSH 23	1	# 1 – 7" O/D x 16" L	2"	80	2.0
FBSH 45	1	# 2 – 7" O/D x 32" L	2"	200	4.4
FBSH 6	1	# 3 – 4" O/D x 9" L	1"	25	0.5
FBSH 10	1	# 4 – 4" O/D x 15" L	1"	40	1


* Inlet/ Outlet sizes to meet customer specifications are available

** Max.flow based on water at 1.0PSI ΔP clean through vessel only. Flows are reduced significantly when filtering viscous liquids.


FBSH SERIES SINGLE BAG FILTER HOUSINGS




FBSH23



FBSH45



FBSH6



FBSH10

**DIMENSION FOR REFERENCE
ONLY NOT TO BE USED FOR
INSTALLATION PURPOSE

HOW TO ORDER

FBSH	23	150	-	304	2
HOUSING TYPE					
MODEL	: FBSH				
	: LBSH*				
HOUSING SIZE					
MODEL 23	: SIZE # 1				
MODEL 45	: SIZE # 2				
MODEL 6	: SIZE # 3				
MODEL 10	: SIZE # 4				
PRESSURE RATING					
150 PSI	: 150				
300 PSI	: 300 (OPTIONAL)				

FITTING TYPE	
NPT	: NPT
FLANGE	: FLG
INLET/OUTLET SIZE	
1	: 1"
1.5	: 1½"
2	: 2"
2.5	: 2½"
3	: 3"

HOUSING MATERIAL	
CARBON STEEL	: CS
304 STAINLESS STEEL	: 304SS
316 STAINLESS STEEL	: 316SS
316L STAINLESS STEEL	: 316LSS
Titanium	: TN

GFS FILTRATION PTE LTD
No.52, Ubi Ave 3, #05-36 Frontier, Singapore 408867
Tel: (65) 6846 4689 Fax: (65) 6846 4875
Email: enquiry@gfsfilter.com Website: www.gfsfilter.com

GFS FILTRATION (M) SDN BHD
No.31, Jalan Tabla 33/21, Shah Alam Technology Park
40400 Shah Alam, Selangor Darul Ehsan, Malaysia
Tel: 603-5122 2988 Fax: 603-5122 5388
Email: sales@gfsfilter.com Website: www.gfsfilter.com



Ultimate in Filtration



URS is a member of Registrar of Standards (Malaysia) Ltd. 613